

Maintaining Contour Trees of Dynamic Terrains

Pankaj K. Agarwal ^{*,†}	Lars Arge [‡]	Thomas Mølhave [†]
Computer Science	MADALGO	SCALGO USA
Duke University	Aarhus University	thomas@scalgo.com
pankaj@cs.duke.edu	large@madalgo.au.dk	
Morten Revsbæk [‡]	Jungwoo Yang [‡]	
MADALGO	MADALGO	
Aarhus University	Aarhus University	
mrevs@madalgo.au.dk	jungwoo@madalgo.au.dk	

Abstract

We consider maintaining the contour tree $\mathbb{T}$ of a piecewise-linear triangulation $\mathbb{M}$ that is the graph of a time varying height function $h : \mathbb{R}^2 \rightarrow \mathbb{R}$. We carefully describe the combinatorial change in $\mathbb{T}$ that happen as h varies over time and how these changes relate to topological changes in $\mathbb{M}$. We present a kinetic data structure that maintains the contour tree of h over time. Our data structure maintains certificates that fail only when $h(v) = h(u)$ for two adjacent vertices v and u in $\mathbb{M}$, or when two saddle vertices lie on the same contour of $\mathbb{M}$. A certificate failure is handled in $O(\log(n))$ time. We also show how our data structure can be extended to handle a set of general update operations on $\mathbb{M}$ and how it can be applied to maintain topological persistence pairs of time varying functions.

^{*}Work supported by NSF under grants CCF-09-40671, CCF-10-12254, and CCF-11-61359, by Grant 2012/229 from the U.S.-Israel Binational Science Foundation, and by an ERDC contract W9132V-11-C-0003.

[†]Supported by U.S. Army Research Office contract W911NF-13-P-0018.

[‡]Center for Massive Data Algorithmics, a Center of the Danish National Research Foundation.

1 Introduction

Within computational geometry, GIS and spatial databases there has been extensive work on developing terrain algorithms for modeling and analyzing the surface of the earth represented as a piecewise-linear triangulated mesh $\mathbb{M}$ also known as a *triangulated irregular network* (TIN). This mesh can be regarded as the graph of a piecewise-linear *height function* $h : \mathbb{R}^2 \rightarrow \mathbb{R}$. Some of the main application areas have been flood risk analysis, visibility analysis and visualization. In the last decade this work has been increasingly fuelled by significant advancements within remote sensing technologies such as LiDAR. These technologies enable mapping the surface of the earth in increasingly high (submeter) resolution for very large areas which has enabled increasingly detailed analysis and visualisation.

The surface of the earth is continuously changing as the result of both natural processes and human activity. Increasingly, this continuous change is captured by surface representations due to technological development within remote sensing and unmanned aerial vehicles that enable low cost, rapid and repeated mapping of the surface of the earth. This development transforms $\mathbb{M}$ from a static to a time-varying object. As $\mathbb{M}$ varies, any derived analysis result has to be updated accordingly to ensure the veracity of the analysis. The frequency of surface updates and the size of surface representations prohibits simply recomputing information derived from the terrain as updates appear. This opens an exciting new frontier within the study of algorithms for terrain analysis where the objective is to efficiently update analysis results as $\mathbb{M}$ varies over time.

Many terrain analysis algorithms rely on explicitly representing and analysing the topology of $\mathbb{M}$ [5, 2, 4]. The most general and widely used representation of terrain topology is the *contour tree*. Let $\mathbb{M}_\ell$ be the intersection of $\mathbb{M}$ with a horizontal plane at height ℓ , then intuitively the contour tree $\mathbb{T}$ represents how the topology of $\mathbb{M}_\ell$ evolves as ℓ goes towards infinity i.e. how the connected components (*contours*) of $\mathbb{M}_\ell$ appear, merge, split and disappear (see Section 2 for a formal definition). In this paper we will show how to efficiently update $\mathbb{T}$ as $\mathbb{M}$ varies over time. Since the contour tree is a widely used building block in many modeling and analysis algorithms this provides an important step towards efficiently maintaining the output of these algorithms as $\mathbb{M}$ varies over time.

1.1 Related Work

The first efficient algorithm for constructing contour trees of piecewise-linear height functions on $\mathbb{R}^2$ was given by Van Kreveld et al. [12] and used $O(n \log(n))$ time. This algorithm was later extended to $\mathbb{R}^3$ by Tarasov and Vyalii in [11], and to arbitrary dimensions by Carr et al. [3]. An out-of-core or so-called I/O-efficient algorithm for constructing contour trees of terrain representations that does not fit in main memory, was given by Agarwal et al. [1]. The *Reeb Graph* is a generalization of the contour tree to manifolds of any dimension. Algorithms have also been presented for efficiently constructing Reeb Graphs.

The study of kinetic data structures that track attributes of time varying geometric systems is well established and a substantial amount of work has been performed within this field. Refer to [8] for a survey of this work. Specifically there has been recent work on maintaining Reeb Graphs and Contour Trees of time varying manifolds. In [6], Edelsbrunner et al. describe an algorithm for maintaining the Reeb Graph of time varying 3-manifolds. They show that if h is a smooth function, then the combinatorial structure of the Reeb Graph only changes in discrete events when (i) a critical point u becomes degenerate (i.e. the Hessian at u becomes singular), or (ii) $h(u) = h(v)$ for two saddle points u and v and both u and v lie on the same contour. If h is a piece-wise linear function, (i) corresponds to two adjacent vertices u and v of $\mathbb{M}$ with $h(u) = h(v)$, and (ii) corresponds to two saddle vertices lying on the same contour. Edelsbrunner et al. maintain a set of certificates that fail only when the combinatorial structure of the Reeb Graph changes. For every certificate failure their algorithm requires $O(n)$ time to restore the combinatorial structure, where n is the number of vertices in $\mathbb{M}$. Wang and Safa [9] suggest an algorithm for maintaining contour trees of time varying piecewise linear 2-manifolds. This algorithm handles certificate failures in $O(\log(n))$ time, however,

they need to process a much larger number of certificate failures since a certificate fails each time any two vertices of $\mathbb{M}$ lie on the same contour. Their algorithm also works for simple 3-manifolds where the Reeb Graph is a contour tree.

1.2 Our Results

We describe an algorithm for maintaining contour trees of time varying 2-manifolds. Our algorithm processes certificate failures in $O(\log(n))$ time and certificates only fail when $h(u) = h(v)$ for two adjacent vertices u and v in $\mathbb{M}$, or when two saddle vertices lie on the same contour. We maintain an auxiliary data structure that maps a vertex in $\mathbb{M}$ to its corresponding edge in $\mathbb{T}$ in $O(\log(n))$ time. This data structure is maintained through certificates that fail as $h(u) = h(v)$ for two adjacent vertices u and v in $\mathbb{M}$.

For simplicity, we focus the description of our data structure on the operation $\text{CHANGEHEIGHT}(v, r)$ that change the height of v in $\mathbb{M}$ to r . Our approach easily generalizes to a setting where all of h varies. We provide a very detailed description of the combinatorial changes that occur in $\mathbb{T}$ as the height of v varies and how these changes relate to topological changes in h . Specifically, we describe how the color of a contour on h transitions during combinatorial changes in $\mathbb{T}$. We show how our data structure can be used to maintain $\mathbb{T}$ under an extended set of operations on $\mathbb{M}$ such as vertex insertion, vertex deletion and edge flip. Finally, we show that our algorithm can be used to maintain topological persistence pairs of h as h varies over time.

2 Preliminaries

Terrains. Let $\mathbb{M} = (V, E, F)$ be a triangulation of $\mathbb{R}^2$, with vertex, edge, and face (triangle) sets V , E , and F , respectively, and let $n = |V|$. We assume that V contains a vertex v_∞ at infinity, and that each edge $\{u, v_\infty\}$ is a ray emanating from u ; the triangles in $\mathbb{M}$ incident to v_∞ are unbounded. Let $h : \mathbb{R}^2 \rightarrow \mathbb{R}$ be a continuous *height function* with the property that the restriction of h to each triangle of $\mathbb{M}$ is a linear map that for unbounded triangles approaches $-\infty$ at v_∞ such that $h(v_\infty) = -\infty$. Given $\mathbb{M}$ and h , the graph of h , called a *terrain* and denoted by Σ , is as a *xy-monotone* triangulated surface whose triangulation is induced by $\mathbb{M}$. That is, vertices, edges, and faces of Σ are in one-to-one correspondence with those of $\mathbb{M}$ and with a slight abuse of terminology we refer to V , E , and F , as vertices, edges, and triangles of both the terrain Σ and $\mathbb{M}$. We assume that $h(u) \neq h(v)$ for vertices $u, v \in V$ such that $u \neq v$.

Critical points. For a vertex v of $\mathbb{M}$, the *star* of v , denoted by $\text{St}(v)$, consists of all triangles incident to v . The *link* of v , denoted by $\text{Lk}(v)$, is the boundary of $\text{St}(v)$, i.e. the cycle formed by edges that are not incident on v but belong to triangles that are in $\text{St}(v)$. The lower (resp. upper) link of v , $\text{Lk}^-(v)$ (resp. $\text{Lk}^+(v)$), is the subgraph of $\text{Lk}(v)$ induced by vertices u with $h(u) < h(v)$ (resp. $h(u) > h(v)$).

A *minimum* (resp. *maximum*) of $\mathbb{M}$ is a vertex v for which $\text{Lk}^-(v)$ (resp. $\text{Lk}^+(v)$) is empty. A maximum or a minimum vertex is called an *extremal* vertex. A non-extremal vertex v is *regular* if $\text{Lk}^-(v)$ (and also $\text{Lk}^+(v)$) is connected, and saddle otherwise; see Figure 1. A vertex that is not regular is called a *critical* vertex. For simplicity, we assume that each saddle vertex v is *simple*, meaning that $\text{Lk}^-(v)$ and $\text{Lk}^+(v)$ consists of only two components.

Level sets and contours. For $\ell \in \mathbb{R}$, the ℓ -*level set*, ℓ -*sublevel set* and ℓ -*superlevel set* of $\mathbb{M}$ are subsets $\mathbb{M}_\ell$, $\mathbb{M}_{<\ell}$, $\mathbb{M}_{>\ell}$ of $\mathbb{R}^2$ consisting of points x , with $h(x) = \ell$, $h(x) < \ell$, and $h(x) > \ell$ respectively. Similarly, the closed ℓ -*sublevel* (resp. ℓ -*superlevel*) set of $\mathbb{M}$ consists of points in $\mathbb{R}^2$ with $h(x) \leq \ell$ (resp. $h(x) \geq \ell$). We will refer to a level set $\mathbb{M}_\ell$ where $\ell = h(v)$ for some critical vertex v as a *critical level*. A *contour* of $\mathbb{M}$ is a connected component of a level set of $\mathbb{M}$. Each vertex $v \in V$ is contained in exactly one contour in $\mathbb{M}_{h(v)}$, which we call *the contour of v* . A contour not passing through a critical vertex is a simple polygonal cycle with non-empty interior. A contour passing through an extremal vertex is a single point, and by our assumption, a contour passing through a saddle consists of two simple cycles with the saddle vertex being

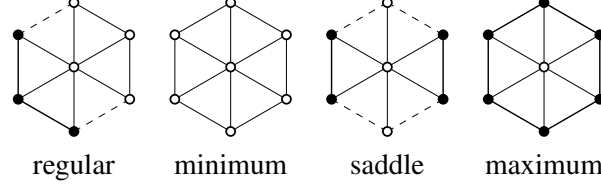


Figure 1: The types of a vertex; lower (resp. upper) link vertices are depicted by filled (resp. hollow) circles.

their only intersection point. A contour C not passing through a vertex can be represented by the circular sequence of edges of $\mathbb{M}$ denoted by $\mathbb{E}(C)$ that it passes through. Two contours are called *combinatorially identical* if their cyclic sequences are the same.

Let $\epsilon = \epsilon(\Sigma)$ denote a sufficiently small positive value, in particular, smaller than height difference between any two vertices of Σ . An *up-contour* of a saddle vertex α is any contour of $\mathbb{M}_{h(\alpha)+\epsilon}$ that intersects an edge incident on α . Similarly, a *down-contour* of α is any contour of $\mathbb{M}_{h(\alpha)-\epsilon}$ that intersects an edge incident on α . If α has two up-contours and one down-contour it is called a *positive saddle vertex*. If it has two down-contours and one up-contour it is called a *negative saddle vertex*. All simple saddles are either negative or positive.

Red and blue contours and saddle vertices. A contour C of $\mathbb{M}_\ell$ is called *blue* if points locally in the interior of C belong to $\mathbb{M}_{<\ell}$ and *red* otherwise. We associate a color with a positive (resp. negative) saddle vertex given by the color of its unique down-contour (resp. up-contour). Refer to Figure 2 to see the possible saddle colors.

Contour trees. Consider raising ℓ from $-\infty$ to ∞ , between critical levels the contours continuously deform but no changes happen to the topology of the level set. At a minimum vertex, a new contour is created. At a maximum vertex an existing contour contracts into a single point and disappears. At a positive saddle vertex v , an existing contour (the down-contour of v) is split into two new contours (the up-contours of v) and at a negative saddle vertex v , two contours (the down-contours of v) merge into one contour (the up-contour of v). The *contour tree* $\mathbb{T}$ of Σ is a tree on the critical vertices of Σ that encodes these topological changes of the level set. An edge (v, w) of $\mathbb{T}$ represents the contour that appears at v and disappears at w .


More formally, two contours C_1 and C_2 at levels ℓ_1 and ℓ_2 , respectively, are called *equivalent* if C_1 and C_2 belong to the same connected component of $\Gamma = \{x \in \mathbb{R}^2 \mid \ell_1 \leq h(x) \leq \ell_2\}$ and Γ does not contain any critical vertex. An equivalence class of contour starts and ends at critical vertices. If it starts at a critical vertex v and ends at w , then (v, w) is an edge in $\mathbb{T}$. We refer to v as a *down neighbor* of w and to w as an *up neighbor* of v . Equivalently $\mathbb{T}$ is the quotient space in which each contour is represented by a point and connectivity is defined in terms of the quotient topology. Let $\rho : \mathbb{M} \rightarrow \mathbb{T}$ be the associated quotient map, which maps all points of a contour to a single point on an edge of $\mathbb{T}$. Note that for any point p on $\mathbb{M}$ that does not correspond to a critical vertex, $\rho(p)$ is interior (not an endpoint) of a single edge in $\mathbb{T}$, if p corresponds to an extremum vertex $\rho(p)$ is the endpoint of a single edge in $\mathbb{T}$, and if p corresponds to a saddle vertex then $\rho(p)$ is the endpoint of several edges of $\mathbb{T}$.

We will assume that each vertex of the contour tree is labeled with the corresponding critical vertex of Σ . The combinatorial description of the contour tree is the set of vertices, their labels, and the set of edges. It will also be convenient to think of the contour tree embedded in Σ , where the coordinates of a vertex of the tree is the same as those of the corresponding vertex in Σ . With a slight abuse of notation we do not distinguish between the combinatorial structure and its embedding in 3D.


Ascent and descent trees. Consider the graph on the vertices of Σ given by creating an edge (w, v) from each vertex v to a single vertex w in $\text{Lk}^-(v)$ unless v is a minimum vertex, in which case no edge is created. This graph is then a forest of trees rooted in the minimum vertices of Σ . We refer to these trees as *descent trees* and denote the descent tree rooted in x as $\Pi^\downarrow(x)$. Similarly, we can define a forest of *ascent trees* given

Type	Contour tree	Terrain	Contour
Red Positive			
Blue Positive			
Blue Negative			
Red Negative			


Figure 2: Saddle Types

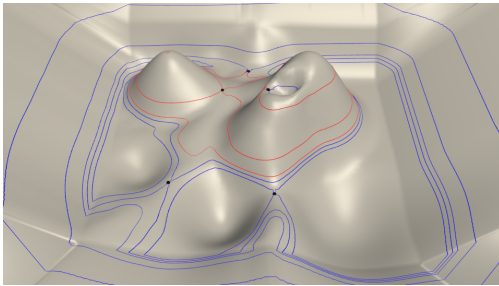

(a)

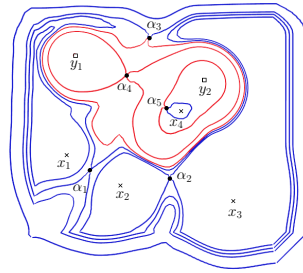

(b)



(c)

Figure 3: (a) (b) An example terrain depicted with contours through saddle vertices and showing the critical vertices of the terrain. (c) The contour tree of the terrain in (a).

by creating the edge (v, w) from every vertex v to a single vertex w in $\text{Lk}^+(v)$ unless v is a maximum, in which case no connection is made. Each ascent tree is rooted in a maximum vertex y and denoted $\Pi^\uparrow(y)$. Note that both the descent tree forest and the ascent tree partitions the vertices in Σ and that every vertex belongs to exactly one descent tree and one ascent tree.

3 Continuous Height Change

Our algorithm maintains the contour tree $\mathbb{T}$ of Σ while allowing the height of vertices in Σ to be changed. More formally, we support the $\text{CHANGEHEIGHT}(v, r)$ operation, that given a vertex v in Σ changes the height of v to r while updating $\mathbb{T}$ to reflect any topological changes that might be caused by the height change. Besides $\mathbb{T}$, we also maintain a descent tree $\Pi^\downarrow(x)$ for every minimum x and an ascent tree $\Pi^\uparrow(y)$ for every maximum y of Σ . These are auxiliary structures that we later on will use to efficiently map between vertices of Σ and leaves of $\mathbb{T}$.

We process a $\text{CHANGEHEIGHT}(v, r)$ operation as a continuous deformation of Σ over time, that changes the height of v to r . During this continuous deformation the combinatorial structure of $\mathbb{T}$ changes only at discrete time instances, called *events*. For simplicity, we assume that no multiple saddle vertex is created during this deformation.

Edelsbrunner et al. [6] showed that if h is a smooth function, then the topology of $\mathbb{T}$ changes when (i) a critical point u becomes degenerate (i.e. the Hessian at u becomes singular), or (ii) $h(u) = h(v)$ for two saddle points u and v and both u and v lie on the same contour. In either case, one of the edges of $\mathbb{T}$ is degenerate in the sense that the interval $[h(u), h(v)]$ is a single point. In our setting, where h is a piecewise-linear function, (i) corresponds to two adjacent vertices u and v with $h(u) = h(v)$ and one of them being a saddle and the other an extremal vertex; (ii) corresponds to two saddle vertices lying on the same contour. The former is called a *birth* or a *death* event and the latter is called an *interchange* event.

Besides these two events, there is another event in the piecewise-linear case, namely, a critical point shifts from one vertex to its neighbor — no new critical points are created, none is destroyed, and the topology of $\mathbb{T}$ does not change. Only the label of a node in $\mathbb{T}$ changes. We refer to this event as the *shift* event. Finally, the ascent and descent trees also change at certain time instances, when an oriented edge (u, v) will be replaced with another edge (u, w) or with the edge (v, u) . The birth, death, shift, and auxiliary events will be referred to as *local* events because they only occur when the height of two adjacent vertices becomes equal.

Before we describe the events in detail we introduce some notation. During the deformation, we use $h_t : \mathbb{M} \rightarrow \mathbb{R}$ to denote the height function at time t . Note that during $\text{CHANGEHEIGHT}(v, r)$, h_t changes only for points in $\text{St}(v)$. If an event occurs at time t , then we refer to t^- (resp. t^+) as the time $t - \varepsilon$ (resp. $t + \varepsilon$) for some arbitrarily small $\varepsilon > 0$. We will use $C_{\alpha\beta}^-$ ($C_{\alpha\beta}^+$) to refer to a contour that retracts to the interior of edge (α, β) in $\mathbb{T}$ at time t^- (t^+). A contour through a critical vertex β at time t^- (t^+) will simply be denoted C_β^- (C_β^+). If β is a saddle vertex then C_β^- (C_β^+) consists of two simple polygonal cycles $K_{\alpha\beta}^-$ ($K_{\alpha\beta}^+$) and $K_{\zeta\beta}^-$ ($K_{\zeta\beta}^+$), belonging to the equivalence classes of contours corresponding to the edges (α, β) and (ζ, β) of $\mathbb{T}$, respectively; β is the only common point of $K_{\alpha\beta}^-$ ($K_{\alpha\beta}^+$) and $K_{\zeta\beta}^-$ ($K_{\zeta\beta}^+$).

3.1 Local events

Suppose a local event occurs at time t_0 at which $h_{t_0}(v) = h_{t_0}(u)$ where u is a neighbor of v . For simplicity, we assume that $h_{t_0^-}(v) < h_{t_0^-}(u)$ and $h_{t_0^+}(v) > h_{t_0^+}(u)$, i.e., the height of v is being raised. The other case when $h_{t_0^-}(v) > h_{t_0^-}(u)$ is symmetric, simply reverse the direction of time. In the following sections we describe in detail the changes that occur to $\mathbb{T}$ during the three kinds of local events. We assume the interval $[t_0^-, t_0^+]$ is sufficiently small so that there is no vertex $w \neq u, v$ whose height lies between those of u and v during this interval.

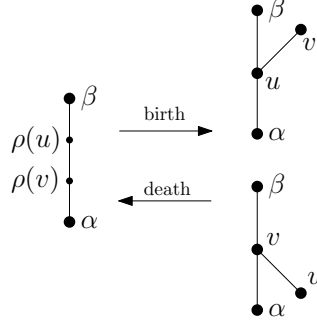


Figure 4: Illustration of the change in the topology of the contour tree in birth and death events

Auxiliary event. An auxiliary event occurs at t_0 if (v, u) is an edge in either an ascent tree or a descent tree.

First, suppose (v, u) is an edge of an ascent tree at t_0^- . We remove the edge (v, u) . If v becomes a maximum vertex at t_0^+ , then v becomes the root of an ascent tree; otherwise, we choose another vertex w from $\text{Lk}^+(v)$ and add the edge (v, w) . If u was a maximum at t_0^- , i.e., u is the root of an ascent tree, then we add the edge (u, v) .

Next, suppose (v, u) is an edge in a descent tree at t_0^- . We delete the edge (v, u) . If u becomes a minimum vertex at t_0^+ , u becomes the root of a descent tree; otherwise we choose a vertex w from $\text{Lk}^-(u)$ and add the edge (w, u) . If v was a minimum vertex at t_0^- , it is no longer a minimum at t_0^+ and we add the edge (u, v) .

Shift event. A shift event occurs at t_0 if one of u and v , say v , was a critical vertex and other vertex, u , was a regular vertex at t_0^- , and the critical vertex shifts from v to u at t_0^+ . This event does not cause any change in the topology of $\mathbb{T}$ but the node of $\mathbb{T}$ that was labeled v changes its label to u . If $h_{t_0^+}(v) > h_{t_0^-}(v)$, i.e., v is being raised then at time t_0^+ , $\rho(v)$ lies on an edge of $\mathbb{T}$ whose lower endpoint is u .

Birth/death event. A *birth event* occurs at time t_0 if both u and v were regular vertices at t_0^- , and they become critical vertices at t_0^+ . A *death event* occurs when both u and v were critical vertices at t_0^- and become regular vertices at t_0^+ . See Figure 4 for the change in the topology of $\mathbb{T}$. We now describe in detail how $\mathbb{T}$ changes at a birth or a death event.

Birth event: If v is being raised, then there are two possibilities: (i) v becomes a negative saddle and u a minimum, or (ii) v becomes a maximum and u a positive saddle. Suppose $\rho(u), \rho(v)$ lie on the edge (α, β) of $\mathbb{T}$. Then we split (α, β) into two edges by adding a node corresponding to the new saddle and creating a new edge incident on this node whose other endpoint is a leaf. In case (i), v is the node added on (α, β) and u is a new leaf, and in (ii) u is the node on the edge (α, β) and v is the new leaf.

Death event: Again, if v is being raised, then there are two possibilities: (i) v is a minimum and u a negative saddle at t_0^- , and (ii) v is a positive saddle and u a maximum at t_0^- . In either case the edge (u, v) disappears from $\mathbb{T}$ at t_0^+ . Two edges incident on this degree 2 vertex merge into a single edge.

Proof of correctness. We now prove that whenever a local event occurs, then either the topology of $\mathbb{T}$ changes because of a birth/death event or the label of a node in $\mathbb{T}$ changes because of a shift event. There are three cases depending on whether u is an extremal, saddle or a regular vertex at time t_0^- .

(i) v is an extremal vertex at time t_0^- . Since $h_{t_0^-}(v) < h_{t_0^-}(u)$, v cannot be a maximum at time t_0^- , so assume that v is a minimum at t_0^- . We observe that u also cannot be a maximum vertex because for any $w \in \text{Lk}(v) \cup \text{Lk}(u)$, $h_{t_0^-}(w) > h_{t_0^-}(v)$, and therefore $h_{t_0^-}(w) > h_{t_0^-}(u)$. If u is a regular vertex at time t_0^- , then v is the only vertex in $\text{Lk}^-(u)$ at t_0^- . At time t_0 a shift event occurs that shifts the minimum from v to u . At t_0^+ , v is a regular vertex with $\text{Lk}^-(v) = u$.

If u is a saddle vertex at time t_0^- , then at time t_0 a death event occurs such that both v and u are regular

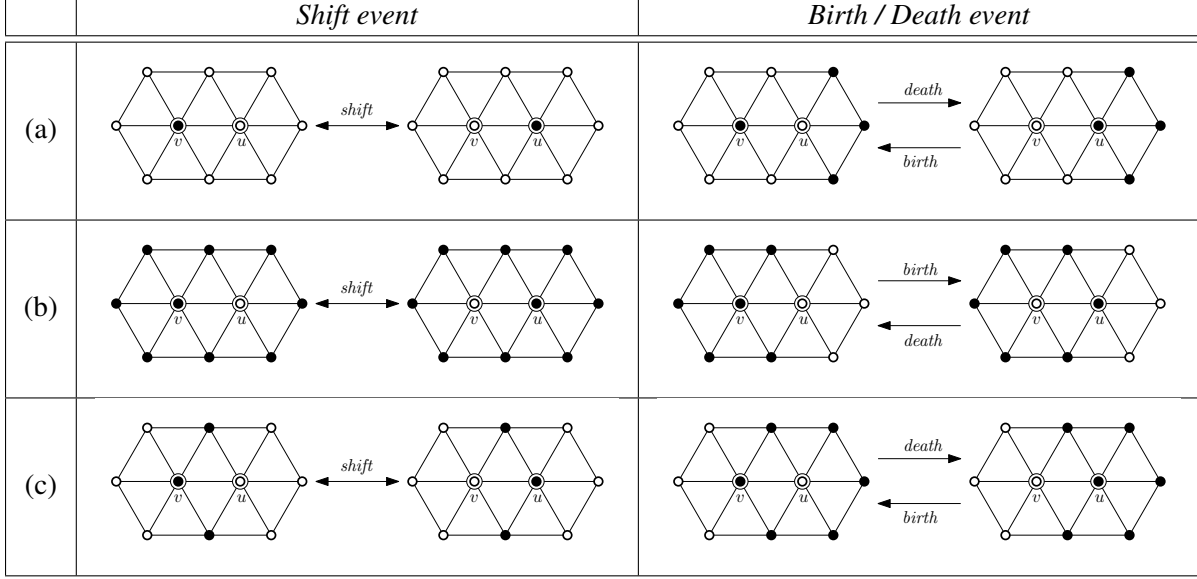


Figure 5: Illustration of local events. (a) is when v is a minimum vertex. (b) is when v is a regular vertex. (c) is when v is a saddle vertex. Hollow vertices has height higher than both u and v and similarly filled vertices has lower height. In all examples v is raised i.e. $h(v) < h(u)$ before the event and $h(v) > h(u)$ after the event.

vertices at time t_0^+ . See Figure 5 (a)

(ii) v is a regular vertex at time t_0^- . If u is the only vertex in $\text{Lk}^+(v)$, then v becomes a maximum vertex. If u is a maximum at t_0^- , then a shift event occurs at t_0 and u becomes a regular vertex at t_0^+ , and if u is a regular vertex at t_0^- then a birth event occurs at t_0 and u becomes a saddle vertex at t_0^+ ; see Figure 5 (b) (Note that u cannot be a saddle vertex at t_0^- because otherwise u becomes a multiple saddle at t_0^+ .)

If $\text{Lk}^+(v)$ contains multiple vertices and u is an endpoint of $\text{Lk}^+(v)$ (degree of u in $\text{Lk}^+(v)$ is 1), then v simply remains a regular vertex at t_0^+ and u switches from $\text{Lk}^+(v)$ to $\text{Lk}^-(v)$. This does not cause $\mathbb{T}$ to change.

Finally, if u is a middle vertex in $\text{Lk}^+(v)$ (degree of u in $\text{Lk}^+(v)$ is 2), v becomes a saddle vertex at time t_0^+ . If u is a regular vertex at time t_0^- , a birth event occurs at t_0 that creates a minimum vertex at u at t_0^+ . If u is a saddle vertex at time t_0^- , then a shift event occurs at t_0 and becomes a regular vertex at t_0^+ .

(iii) v is a saddle vertex at time t_0^- . Note that since we assume that no multiple saddles can be created during deformation, u can not be the middle vertex of $\text{Lk}^+(v)$ at time t_0^- . If u is the only vertex in $\text{Lk}^+(v)$, then v becomes a regular vertex. If u is a regular vertex at t_0^- , then a shift event occurs at t_0 and u becomes a saddle vertex at t_0^+ , and if u is a maximum vertex at t_0^- then a death event occurs at t_0 and u becomes a regular vertex at t_0^+ ; see Figure 5 (c). (Note that u cannot be a saddle vertex at t_0^- because otherwise u becomes a multiple saddle at t_0^+ .)

Finally, If u is an endpoint of $\text{Lk}^+(v)$ neither v nor u changes vertex type.

3.2 Interchange events

An interchange event occurs at time t_0 if there are two saddle vertices α, β such that $h_{t_0}(\alpha) = h_{t_0}(\beta)$ and both α and β lie on the same contour, i.e., $\rho(\alpha) = \rho(\beta)$ at time t_0 . There are four cases depending on whether α and β are positive or negative saddles. Suppose $h_{t_0^-}(\alpha) < h_{t_0^-}(\beta)$. Without loss of generality assume that

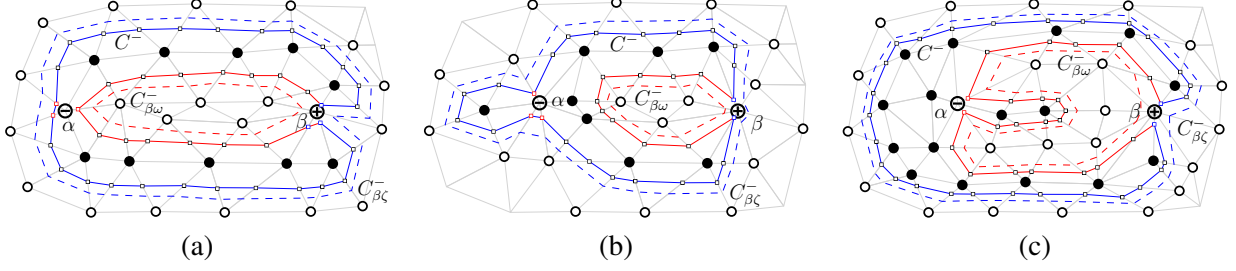


Figure 6: Illustration of the possible colorings of C^- for mixed interchange events. Showing the negative saddle α and positive saddle β . Red (blue) contour vertices represent the vertices marked with α (resp. β). Hollow vertices of $\mathbb{M}$ has height higher than both α and β and similarly filled vertices has lower height. (a) Contour vertices marked α and β are interleaved along C^- . (b) Contour vertices marked α lie in the blue part of C^- . (c) Contour vertices marked β lie in the red part of C^- .

α is a negative saddle. The other case, when α is positive can be reduced to this case by reversing the z -axis and/or time axis; see below. Then there are two cases: (i) α is negative and β is positive, and (ii) both α and β are negative saddles. We refer to them as *mixed* and *negative* interchange events. We describe these events and their effect on $\mathbb{T}$ in detail in the following sections, but first we introduce some notation.

At time t_0^- all contours in the equivalence class (α, β) are combinatorially identical because no vertex of $\mathbb{M}$ retracts to the interior of the edge (α, β) of $\mathbb{T}$. With a small abuse of notation, we will therefore simply refer to all contours in (α, β) as the contour C^- without specifying a certain level of the contour. Similarly, at time t_0^+ all contours in (β, α) are combinatorially identical, we refer to these as C^+ . We label the vertices of C^- (C^+) that lie on edges incident to α (resp. β) with α (resp. β).

3.2.1 Mixed interchange event

We first consider the case when α is negative and β is positive. We assume that the edge (α, β) is blue at t_0^- , so both α and β are blue at t_0^- . The case when (α, β) is red reduces to this case by reversing the direction of the z -axis. Let ξ and η be the two down neighbors of α and ζ, ω the up neighbors of β at time t_0^- . Both (ξ, α) and (η, α) are blue edges. Assume without loss of generality that the edge (β, ζ) is blue and (β, ω) is red i.e. the up-contours $C_{\beta\omega}^-$ of β is red and the up-contour $C_{\beta\zeta}^-$ of β is blue. Refer to Figure 7.

Since α is a negative saddle and β is positive, the vertices of C^- labeled with α form two intervals that are connected and non-adjacent in C^- . The same is true for vertices labeled β (C^- intersects both components of $\text{Lk}^+(\alpha)$ and $\text{Lk}^-(\beta)$). Since β is the only vertex between C^- and the up-contours $C_{\beta\zeta}^-$, $C_{\beta\omega}^-$ of β , all vertices of C^- are either interior to an edge in $\mathbb{E}(C_{\beta\zeta}^-)$, labelled with β or interior to an edge in $\mathbb{E}(C_{\beta\omega}^-)$. We mark the portion of C^- that intersects $\mathbb{E}(C_{\beta\omega}^-)$ red and the portion that intersects $\mathbb{E}(C_{\beta\zeta}^-)$ blue according to the color of the contours $C_{\beta\omega}^-$ and $C_{\beta\zeta}^-$, respectively. Refer to Figure 6. Similarly, let $C_{\xi\alpha}^-$ and $C_{\eta\alpha}^-$ be the down-contours of α , then all vertices of C^- are either interior to an edge in $\mathbb{E}(C_{\xi\alpha}^-)$, labelled with α or interior to an edge in $\mathbb{E}(C_{\eta\alpha}^-)$. There are three types of mixed interchange events depending on the relative positions of the vertices marked α and those marked β in C^- . See Figure 6.

- (i) A *sign-interchange* when vertices marked α and those marked β in C^- are interleaved (vertices marked α intersect both $\mathbb{E}(C_{\beta\zeta}^-)$ and $\mathbb{E}(C_{\beta\omega}^-)$).
- (ii) A *blue* event when vertices marked α lie in the blue portion of C^- (vertices marked α intersect $\mathbb{E}(C_{\beta\zeta}^-)$).
- (iii) A *red* event when vertices marked α lie in the red portion of C^- (vertices marked α intersect $\mathbb{E}(C_{\beta\omega}^-)$).

In case (ii) and (iii), without loss of generality assume that the vertices labeled β intersect $\mathbb{E}(C_{\eta\alpha}^-)$. The following lemma then characterizes the change of $\mathbb{T}$ at a mixed interchange event.

Lemma 1. *Assuming that the edge (α, β) is blue at t_0^- and α lying below β at t_0^- , the following change occurs in $\mathbb{T}$ at t_0 :*

- (i) *At a sign-interchange event, the topology of $\mathbb{T}$ does not change. The only change is that the label α and β of $\mathbb{T}$ get swapped, so α becomes a positive (resp. negative) saddle at t_0^+ . See Figure 7 (a).*
- (ii) *At a blue event, the signs of α and β do not change, and the color of (α, β) remains blue. At time t_0^+ , η is the down neighbor of β , α and ω are the up neighbors of β , ξ and β are down neighbors of α , and ζ is the up neighbor of α . See Figure 7 (b).*
- (iii) *At a red event, the signs of α and β do not change but the edge (α, β) becomes red and so does the saddle α ; β remains a blue positive saddle. Furthermore, η is down neighbor of β , α and ζ are the up neighbors of β , ξ and β are down neighbors of α , and ω is the up neighbor of α . See Figure 7 (c).*

Proof. We prove the case (i) in detail and sketch the proof for the other two cases, as the argument is similar to case (i).

Consider the sign-interchange event. Let $C_{\xi\alpha}^-$, $C_{\eta\alpha}^-$ and $C_{\beta\zeta}^-$, $C_{\beta\omega}^-$ be the the down-contours of α and the up-contours of β at time t_0^- , respectively. Let $\theta_{down} = h_{t_0^-}(\alpha) - \epsilon$ and $\theta_{up} = h_{t_0^-}(\beta) + \epsilon$ be the level of the down-contours and up-contours, respectively. Assume that $\theta_{up} > h_{t_0^+}(\alpha)$.

First we fix the time t_0^- and consider the contour C^- as we decrease the level towards $h_{t_0^-}(\alpha)$. The vertices of C^- marked α converge to α of Σ , and we obtain C_α^- . Since the vertices marked α and β in C^- are interleaved, each $K_{\xi\alpha}^-$ and $K_{\eta\alpha}^-$ contains an interval where the vertices are marked β and therefore so does $C_{\xi\alpha}^-$ and $C_{\eta\alpha}^-$. Similarly, $C_{\beta\zeta}^-$ and $C_{\beta\omega}^-$ each contain an interval where the vertices are marked α . Refer to Figure 8(a).

Next we fix the height θ_{down} and θ_{up} and move forward in time. As time moves towards t_0^+ , $C_{\xi\alpha}^-$, $C_{\eta\alpha}^-$, $C_{\beta\zeta}^-$ and $C_{\beta\omega}^-$ continuously deforms but no topological changes occur to the contours. Let $H_{\xi\alpha} : \mathbb{R}^2 \times [t_0^-; t_0^+] \rightarrow \mathbb{R}^2$ represent the continuous deformation of $C_{\xi\alpha}^-$. For brevity of description we will simply refer to $H_{\xi\alpha}(C_{\xi\alpha}^-, t_0^+)$ as $H(C_{\xi\alpha}^-)$. Similarly for $H(C_{\eta\alpha}^-)$, $H(C_{\beta\zeta}^-)$ and $H(C_{\beta\omega}^-)$. Note that $\mathbb{E}(C_{\xi\alpha}^-) = \mathbb{E}(H(C_{\xi\alpha}^-))$, $\mathbb{E}(C_{\eta\alpha}^-) = \mathbb{E}(H(C_{\eta\alpha}^-))$, $\mathbb{E}(C_{\beta\zeta}^-) = \mathbb{E}(H(C_{\beta\zeta}^-))$ and $\mathbb{E}(C_{\beta\omega}^-) = \mathbb{E}(H(C_{\beta\omega}^-))$. Refer to Figure 8(b).

Now we fix the time to t_0^+ and increase the height from θ_{down} and monitor how the contours $H(C_{\xi\alpha}^-)$ and $H(C_{\eta\alpha}^-)$ deform. Recall that $h_{t_0^+}(\beta) < h_{t_0^+}(\alpha)$, so as we increase the height, we first encounter β and the vertices of $H(C_{\xi\alpha}^-)$, $H(C_{\eta\alpha}^-)$ marked β converge to the vertex β of $\mathbb{M}$. Hence, β is now a negative saddle. Since both $H(C_{\xi\alpha}^-)$, $H(C_{\eta\alpha}^-)$ are blue, so is the saddle β at t_0^+ . The up-contour C^+ of β at time t_0^+ is therefore a blue contour such that $\mathbb{E}(C^+)$ contains all edges of $\mathbb{E}(H(C_{\xi\alpha}^-)) \cup \mathbb{E}(H(C_{\eta\alpha}^-))$ that are not incident on β . If we continue to increase the height, the vertices of C^+ marked α converge to α as we reach $h_{t_0^+}(\alpha)$, and it splits into two contours at α . Since C^+ was a blue contour, α is now a blue positive saddle. The up-contours of α at time t_0^+ will be $H(C_{\beta\zeta}^-)$ and $H(C_{\beta\omega}^-)$, so ζ and ω will be up-neighbors of α . Refer to Figure 8(b). This completes the proof of the first part of the lemma.

Next if the vertices marked α and β are not interleaved in C^- , then by our assumption the vertices marked β only intersect $\mathbb{E}(H(C_{\eta\alpha}^-))$. Hence, as we increase the height from θ_{down} to $h_{t_0^+}(\beta)$, the vertices marked β in $H(C_{\eta\alpha}^-)$ converge to the vertex β of $\mathbb{M}$ and $H(C_{\eta\alpha}^-)$ splits into two contours at β . Note that as we increase the height $H(C_{\xi\alpha}^-)$ also deforms but does not meet β , as it has no vertices marked β . Hence β is a blue positive saddle, with η as the down neighbor of β . Let C_β^+ be the contour passing through β at time t_0^+ .

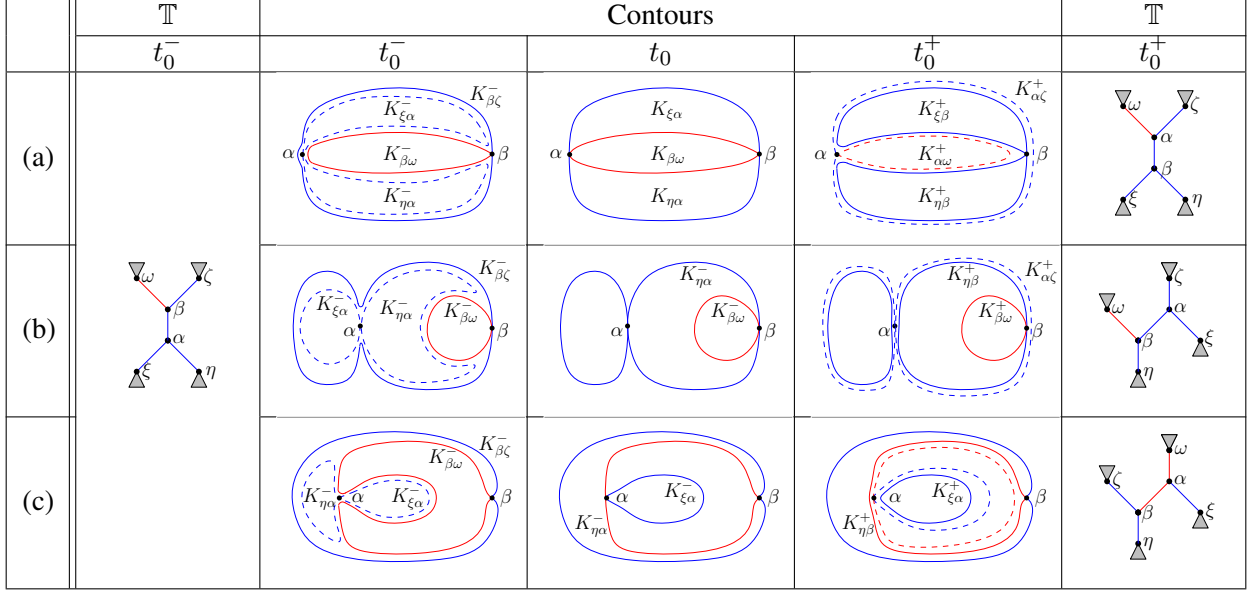


Figure 7: Illustration of topological changes in $\mathbb{M}_\ell$ and contour tree transitions during mixed interchange events. Dashed contour lines are contours at the height of α and solid contour lines are contours at the height of β . (a) Illustrates a sign change event. (b) Illustrates a blue event. (c) Illustrates a red event.

If the blue event occurs, then vertices marked α are contained in edges of $\mathbb{E}(H(C_{\beta\zeta}^-))$. We can divide C_β^+ into two cycles $K_{\beta\omega}^+$, $K_{\beta\alpha}^+$ of vertices intersecting $\mathbb{E}(H(C_{\beta\omega}^-))$ and $\mathbb{E}(H(C_{\beta\zeta}^-))$, respectively. As we increase the height to $h_{t_0^+}(\alpha)$, the vertices marked α in C^+ and $H(C_{\xi\alpha}^-)$ converge to α , and the two contours merge into a single contour C_α^+ at α . Since the color of both $H(C^+)$ and $H(C_{\xi\alpha}^-)$ is blue, α remains a blue negative saddle. The up-contour of α at time t_0^+ is $H(C_{\beta\zeta}^-)$ and the contour $H(C_{\beta\omega}^-)$ remains an up-contour of β . This proves part (ii) of the lemma.

The proof for the third case is symmetric and omitted from here. $\square$

The above lemma characterizes the changes in the contour tree at a mixed interchange event under the assumption that α was a blue negative saddle at t_0^- . As mentioned above, the other cases can be reduced to the above case. In particular, if at time t_0^- , α is a red negative saddle, reverse the direction of the z -axis; if α is a blue positive saddle, reverse the direction of time; and if α is red positive saddle, then reverse the direction of time as well as that of the z -axis.

3.2.2 Negative interchange event

Let ξ, η be the two down neighbors of α at t_0^- , and let ζ be the other down neighbor of β (α is a down neighbor of β at t_0^-). See Figure 10. The change in topology of $\mathbb{T}$ at a negative interchange event is similar to performing a rotation at node β . That is, α becomes the upper endpoint and β the lower endpoint of the edge (α, β) at time t_0^+ , and one of the down subtrees of α (rooted in ξ and η) becomes a down subtree of β . Next we describe the change of $\mathbb{T}$ in more detail, and also argue why our analysis is correct.

Let $C_{\xi\alpha}^-$ and $C_{\eta\alpha}^-$ be the down-contours of α . Since both α and β are negative saddles, the vertices of C^- labeled with α form two connected components, and the vertices labeled with β form a single connected component (C^- intersects both components of $\text{Lk}^+(\alpha)$ but only a single component of $\text{Lk}^-(\beta)$). Since α is the only vertex between C^- and the down-contours of α , all vertices of C^- are either interior to an edge in $\mathbb{E}(C_{\xi\alpha}^-)$, labelled with α or interior to an edge in $\mathbb{E}(C_{\eta\alpha}^-)$. Since we assume the absence of multiple saddles,

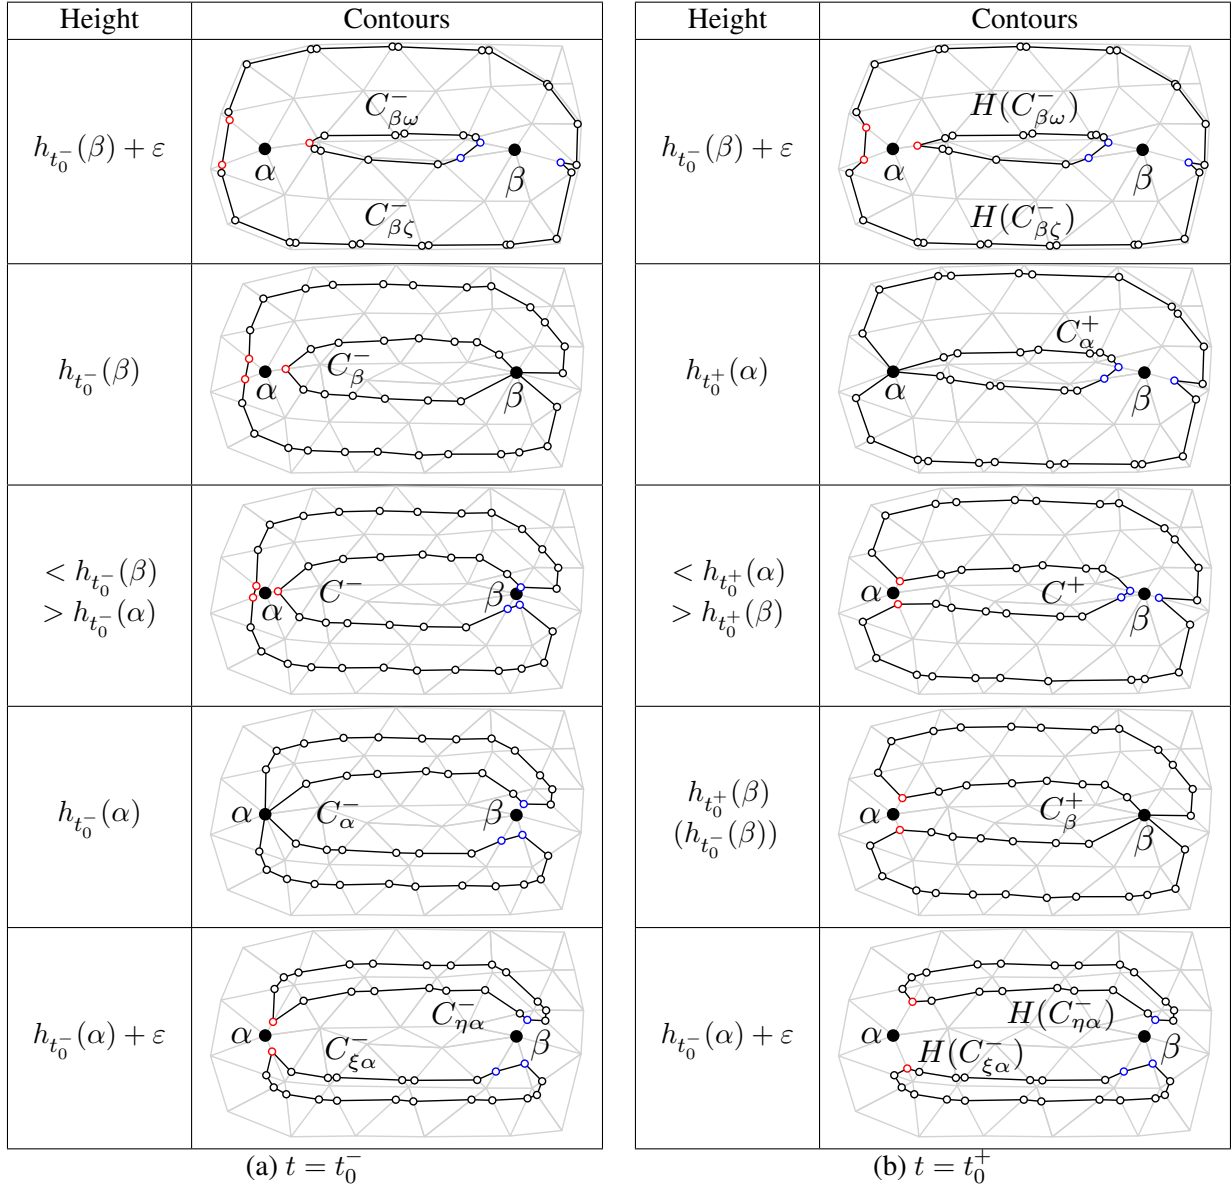


Figure 8: Illustration of sign change event. The vertices marked α are illustrated as red vertices and the vertices marked β as blue vertices.

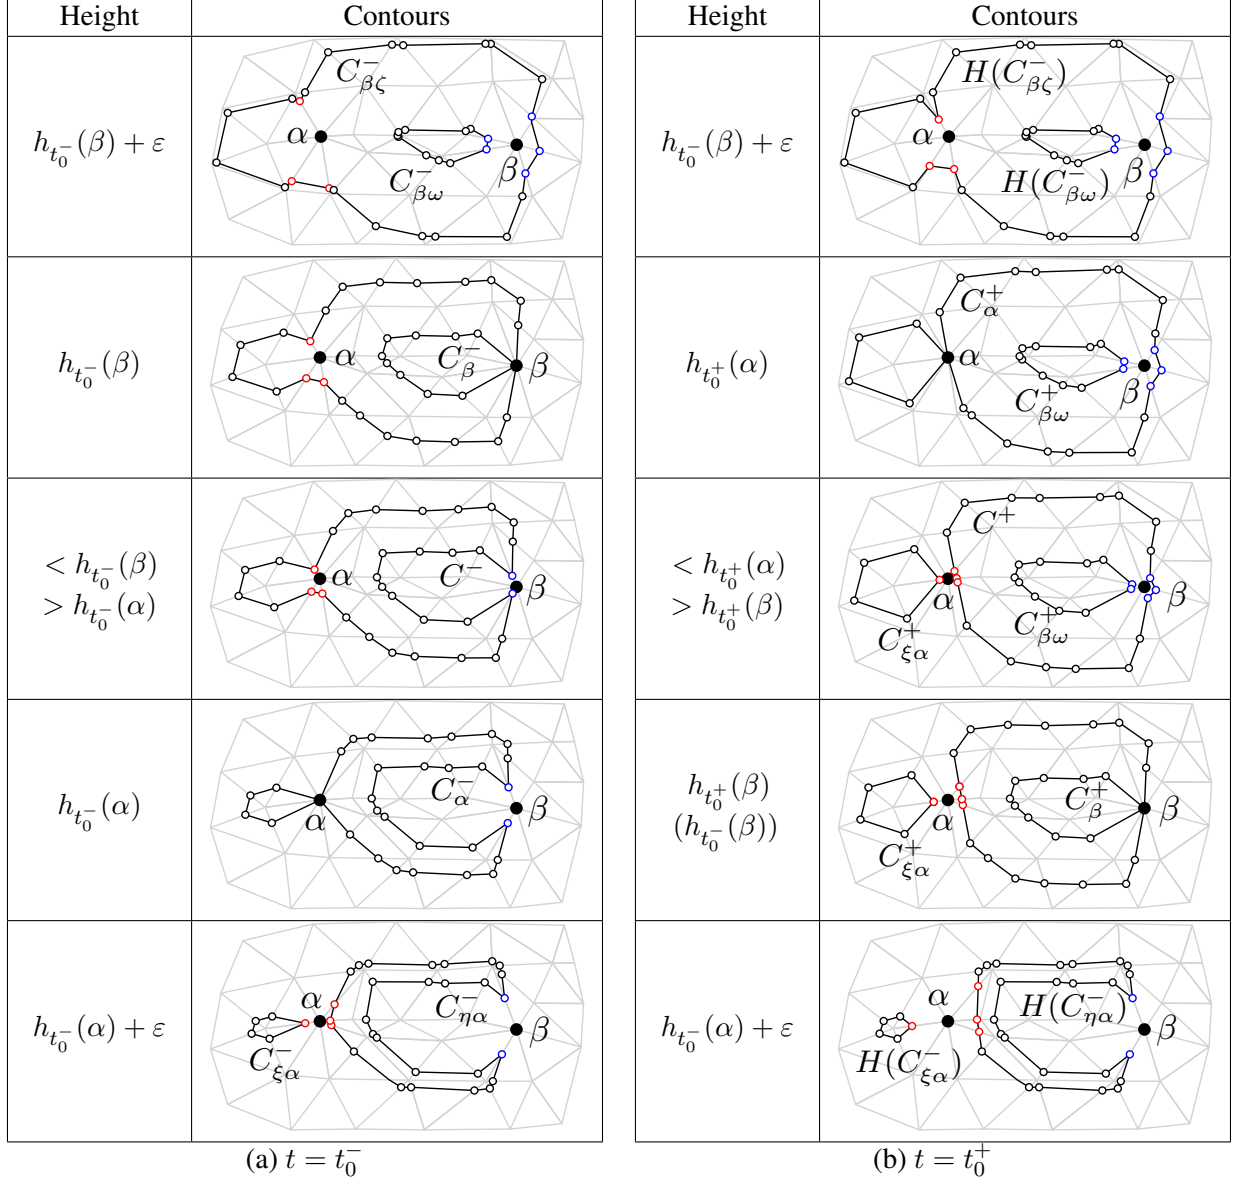


Figure 9: Illustration of blue event. The vertices marked α are illustrated as red vertices and the vertices marked β as blue vertices.

the vertices of C^- labelled with β can not intersect both $\mathbb{E}(C_{\xi\alpha}^-)$ and $\mathbb{E}(C_{\eta\alpha}^-)$.

Lemma 2. *If the vertices of C^- marked β are interior to $\mathbb{E}(C_{\eta\alpha}^-)$, then at time t_0^+ , η becomes a down neighbor of β , ζ the other down neighbor of β , and ξ and β becomes the down neighbor of α .*

Proof. Let $\theta = h_{t_0^-}(\alpha) - \epsilon$ be the level of down-contours $C_{\xi\alpha}^-$ and $C_{\eta\alpha}^-$, and let $C_{\zeta\beta}^-$ be the contour at level θ along (ζ, β) . We fix the height at θ and go forward in time. As time moves towards t_0^+ , $C_{\xi\alpha}^-$, $C_{\eta\alpha}^-$ and $C_{\zeta\beta}^-$ continuously deforms, but no topological changes occur to these contours. Let $H_{\xi\alpha} : \mathbb{R}^2 \times [t_0^-; t_0^+] \rightarrow \mathbb{R}^2$ represent the continuous deformation of $C_{\xi\alpha}^-$. For brevity of description we will simply refer to $H_{\xi\alpha}(C_{\xi\alpha}^-, t_0^+)$ as $H(C_{\xi\alpha}^-)$. Similarly for $H(C_{\eta\alpha}^-)$ and $H(C_{\zeta\beta}^-)$. Assume that the vertices of C^- marked β are interior to $\mathbb{E}(C_{\eta\alpha}^-)$ then $C_{\eta\alpha}^-$ and $C_{\zeta\beta}^-$ have vertices marked β ; and $C_{\xi\alpha}^-$ and $C_{\eta\alpha}^-$ have vertices marked α . Note that $\mathbb{E}(C_{\xi\alpha}^-) = \mathbb{E}(H(C_{\xi\alpha}^-))$, $\mathbb{E}(C_{\eta\alpha}^-) = \mathbb{E}(H(C_{\eta\alpha}^-))$ and $\mathbb{E}(C_{\zeta\beta}^-) = \mathbb{E}(H(C_{\zeta\beta}^-))$.

We now fix time at t_0^+ . Recall that $\theta < h_{t_0^+}(\beta) < h_{t_0^+}(\alpha)$. As we increase the height from θ to $h_{t_0^+}(\beta)$, the vertices marked β in $H(C_{\eta\alpha}^-)$ and $H(C_{\zeta\beta}^-)$ converge to β , and thus $H(C_{\eta\alpha}^-)$ and $H(C_{\zeta\beta}^-)$ merge into a single contour C^+ at β . Thus β is a negative saddle and has η and ζ as its down neighbors.

Next, we increase the height from $h_{t_0^+}(\beta)$ to $h_{t_0^+}(\alpha)$. The merged contour C^+ , contains vertices marked α and so does the contour $H(C_{\xi\alpha}^-)$. Hence as the height reaches $h_{t_0^+}(\alpha)$, the vertices marked α in $H(C_{\xi\alpha}^-)$ and C^+ converge to α . Hence at time t_0^+ , α is a negative saddle with β and ξ as its two down neighbors. This completes the proof of the lemma. $\square$

Next, we analyze the change in colors of α and β at the above event. There are three cases depending on the colors of α and β at time t_0^- .

First, assume that β is blue at t_0^- , then α is also blue at t_0^- , and so are the cycles $K_{\alpha\beta}^-$, $K_{\zeta\beta}^-$, $K_{\xi\alpha}^-$, $K_{\eta\beta}^-$. See Figure 10 (a). Moreover, $K_{\alpha\beta}^-$, $K_{\zeta\beta}^-$ lie in the exterior of each other and so do $K_{\xi\alpha}^-$ and $K_{\eta\alpha}^-$. Consequently C_{ξ}^- , C_{η}^- , C_{ζ}^- lie in the exterior of each other, and the same holds for C_{ξ}^+ , C_{η}^+ , and C_{ζ}^+ . We can now conclude that α and β remain blue negative saddles at time t_0^+ .

Next, assume that β is red at t_0^- . Then one of (α, β) or (ζ, β) is red and the other is blue. We assume that (α, β) is red; we will argue below that the other case can be reduced to this case. In this case $K_{\alpha\beta}^-$ lies in the interior of the cycle $K_{\alpha\beta}^-$; see Figure 10 (b), (c). If α is red, then one of (ξ, α) and (η, α) is red and the other is blue. First assume that (η, α) is red at t_0^- . So $K_{\xi\alpha}^-$ lies in the interior of $K_{\eta\alpha}^-$: see Figure 10 (b). Hence C_{η}^- contains both C_{ξ}^- and C_{ζ}^- in its interior. Therefore at time t_0 , the contour $K_{\alpha=\beta}$ passing through α and β consists of three cycles $K_{\xi\alpha}$, $K_{\eta\alpha}$, and $K_{\zeta\beta} - K_{\eta\alpha}$ containing both $K_{\xi\alpha}$ and $K_{\zeta\beta}$ at α and β , respectively. At time t_0^+ , both α and β remain red. See Figure 10 (b).

Finally, consider the case when (ξ, α) is red and (η, α) is blue. In this case, $K_{\xi\alpha}^-$ contains $K_{\eta\alpha}^-$ in its interior. At time t_0 , $C_{\alpha=\beta}$ consists of three cycles $K_{\xi\alpha}$, $K_{\eta\alpha}$, and $K_{\zeta\beta} - K_{\xi\alpha}$ containing both $K_{\eta\alpha}$ and $K_{\zeta\beta}$ in its interior with $K_{\xi\alpha}$ touching $K_{\eta\alpha}$ at α and $K_{\eta\alpha}$ touching $K_{\zeta\beta}$ at β . At time t_0^+ , α remains red but β becomes blue. See Figure 10 (c).

We conclude this case by noticing that the case when α is blue can be reduced to the third case above by reversing the direction of time. Refer to Figure 10 (c).

4 Event Handling

In this section we describe how to efficiently maintain $\mathbb{T}$ of Σ under the events described in the previous section. We first describe the data structure used to represent the contour, ascent and descent trees of Σ . Second, we describe the mechanisms that we use to repair this structure for each event. Finally, we will describe how each event is detected during a $\text{CHANGEHEIGHT}(v, r)$ operation.

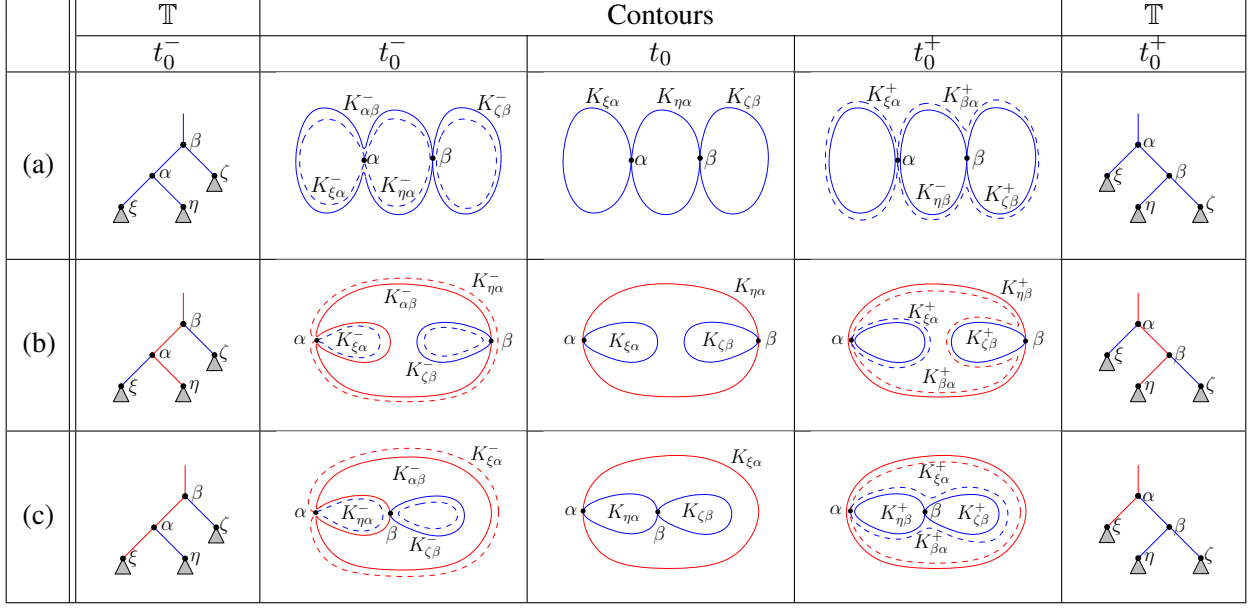


Figure 10: Illustration of topological changes in $\mathbb{M}_\ell$ and contour tree transitions during negative interchange events. Dashed lines are contours at the height of α and solid lines are contours at the height of β . (a) is when K_β is blue. (b) and (c) are when K_β is red.

4.1 Data Structure

Our data structure represents both the contour, ascent and descent trees of Σ as *link-cut trees* [10] that allow for efficiently maintaining a dynamic forrest F . Specifically, for v and w in F the $\text{LINK}(v, w)$ operation connects the trees containing v and w by inserting the edge (v, w) , the $\text{CUT}(v, w)$ operation splits the tree containing v and w by removing the edge (v, w) , the $\text{EVERT}(v)$ operation makes v the root of the tree containing v , and the $\text{ROOT}(v)$ operation queries for the root of the tree containing v . All operations require $O(\log(n))$ time where n is the size of the forrest. Furthermore, if every edge of F is associated with a cost, we can evaluate functions on root-to-leaf paths finding e.g. the minimum cost along the path in $O(\log(n))$ time. If the costs along a root-to-leaf path in F are decreasing we can also search for edges with a given cost along the path in $O(\log(n))$ time.

We augment the vertices of Σ with pointers to their corresponding instances in both the ascent and descent tree forest. Also, we augment each critical vertex in Σ with a pointer to its corresponding vertex in $\mathbb{T}$. Finally, for each vertex v in Σ we conceptually order the vertices in $\text{Lk}(v)$ clockwise around v and maintain a *link pointer* to the start and end vertex of each connected component of $\text{Lk}^-(v)$ and $\text{Lk}^+(v)$.

Our datastructure links the root x of the descent tree $\Pi^\downarrow(x)$ and the root y of the ascent tree $\Pi^\uparrow(y)$ to their corresponding leafs in $\mathbb{T}$. Conceptually we have the ascent and descent tree regions of Σ hanging of the leafs of $\mathbb{T}$. Refer to Figure 11. Consider the operation $\text{FINDEDGE}(v)$ that given a vertex v in Σ returns the edge (α, β) of $\mathbb{T}$ containing $\rho(v)$. Our structure easily supports this operation in $O(\log(n))$ time. Assume that v belongs to $\Pi^\downarrow(x)$ and $\Pi^\uparrow(y)$ we compute (α, β) by retrieving leafs x and y of $\mathbb{T}$, rooting $\mathbb{T}$ in y and finally searching for (α, β) on the root-to-leaf path from y to x .

4.2 Repair Mechanisms

Based on the description in Section 3 of events and the changes they cause in the contour tree and ascent/descent trees of Σ , we will now go through each event type and show how to efficiently repair our data

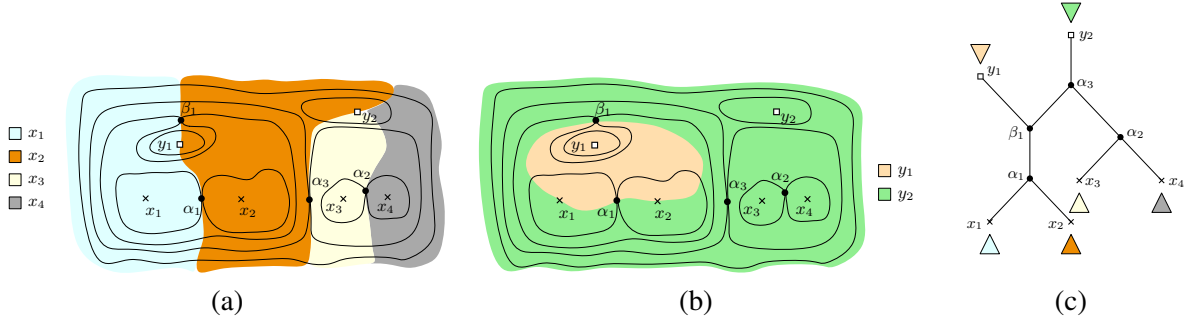


Figure 11: (a) Illustrates the subdivision of the terrain represented by the descend tree forest. (b) Illustrates the subdivision of the terrain represented by the ascend tree forest. (c) Our data structure consists of the contour tree connected with descent trees at minimum vertices and with ascend trees at maximum vertices.

structure.

Auxiliary event. Consider an auxiliary event that occurs on edge (v, u) in descent tree $\Pi^\downarrow(x)$, we need to cut the subtree rooted in u from $\Pi^\downarrow(x)$ and potentially link the subtree to some other descent tree containing vertex w in $\text{Lk}^-(u)$. Since the descent tree is represented as a dynamic tree and since v points to its instance in $\Pi^\downarrow(x)$, this is easily done using $O(\log(n))$ time. This is similar for auxiliary events that occur on ascent trees.

During an auxiliary event we might also need to update link pointers in v and u . The links change as described in the correctness proof in Section 3.1 and since there are only a constant number of link pointers, these can straightforwardly be updated in $O(1)$ time using the clockwise ordering of $\text{Lk}(v)$ and $\text{Lk}(u)$.

Shift event. Consider a shift event that shifts a critical vertex between v and u . In this case we simply update our data structure by switching the labels of v and u in $\mathbb{T}$ and the ascent/descent trees containing u and v . This can be done in $O(1)$ time since each vertex of Σ points to its instance in ascent/descent trees of Σ and every critical vertex of Σ points to its corresponding vertex in $\mathbb{T}$ of Σ .

Birth/death event. Consider a birth event where both u and v were regular vertices before the event and become critical vertices after the event. Before the event both $\rho(u)$ and $\rho(v)$ lie on the same edge (α, β) of $\mathbb{T}$. The event splits (α, β) into two by adding a new saddle node to $\mathbb{T}$ and creating an edge incident on this node whose other endpoint is a leaf. Recall Figure 4. Performing these changes on $\mathbb{T}$ is trivial once we know (α, β) and we can simply use $\text{FIND\_EDGE}(v)$ to retrieve (α, β) in $O(\log(n))$ time. Handling death events is trivial since u and v are critical vertices with pointers to $\mathbb{T}$, thus it simply corresponds to removing a leaf edge of $\mathbb{T}$.

Mixed interchange event. Consider a mixed interchange event where a negative saddle vertex α is raised above a positive saddle β as described in Section 3.2. From Lemma 1, we get a complete description of the changes that occur to $\mathbb{T}$ for each type of mixed interchange event, making these changes to our representation of $\mathbb{T}$ is trivial, so what remains is to detect which kind of event that takes place at time t_0 . Recall that at time t_0^- the vertices along C^- marked with β lie in two disjoint intervals. Removing these vertices from C^- divides the contour into two chains; One consisting of vertices interior to edges in $\mathbb{E}(C_{\beta\zeta}^-)$ and one consisting of vertices interior to edges in $\mathbb{E}(C_{\beta\omega}^-)$. From Section 3.2 we get that a sign-interchange event occurs at time t_0 if vertices of C^- marked α belong both to edges in $\mathbb{E}(C_{\beta\zeta}^-)$ and $\mathbb{E}(C_{\beta\omega}^-)$; A blue event occurs at time t_0 if vertices of C^- marked α belong to $\mathbb{E}(C_{\beta\zeta}^-)$; A red event occurs at time t_0 if vertices of C^- marked α belong to $\mathbb{E}(C_{\beta\omega}^-)$.

Note that an interval of C^- marked α intersects edges of Σ that are incident to vertices in the same connected component of $\text{Lk}^+(\alpha)$. Therefore to determine whether this interval belong to $\mathbb{E}(C_{\beta\zeta}^-)$ or $\mathbb{E}(C_{\beta\omega}^-)$, we can select a vertex v_i in the corresponding component of $\text{Lk}^+(\alpha)$, and determine whether the edge (α, v_i) belong to $\mathbb{E}(C_{\beta\zeta}^-)$ or $\mathbb{E}(C_{\beta\omega}^-)$. The edge (α, v_i) belongs to $\mathbb{E}(C_{\beta\zeta}^-)$ if and only if there exists an ascending

path from v_i that ends in a maximum vertex of Σ corresponding to a leaf node in the up subtree $\mathbb{T}_\zeta$ of $\mathbb{T}$ rooted in ζ . Let y_i be the maximum vertex of Σ such that v_i belongs to $\Pi^\uparrow(y_i)$, we check that y_i belongs to $\mathbb{T}_\zeta$, by simply determining whether the path from α to y_i in $\mathbb{T}$ goes through ζ . Given v_i our algorithm retrieves y_i as the root of the dynamic tree $\Pi^\uparrow(y_i)$ in $O(\log(n))$ time. We then root $\mathbb{T}$ in α and test whether the first vertex on the root-to-leaf path from α to y_i is ζ . This is straightforward to in $O(\log(n))$ time using standard dynamic tree operations.

Negative Interchange Event. Consider a negative interchange event where a negative saddle vertex α is raised above a negative saddle β . As shown in Section 3.2 there is only one kind of topological change that can occur to $\mathbb{T}$ during this event and this change corresponds to performing a rotation at node β . According to Lemma 2 we can determine which down subtree of α becomes the down subtree of β after the rotation, by determining whether vertices along C^- marked β are within $\mathbb{E}(C_{\alpha\xi}^-)$ or $\mathbb{E}(C_{\alpha\eta}^-)$. We omit the details of this algorithm since it is similar to the algorithm for handling mixed interchange events except that we use the descent trees of Σ instead of the ascent trees.

4.3 Event Detection

Let X contain the set of vertices in $\text{Lk}^+(v)$ as well as the upper node of every edge e in $\mathbb{T}$ whose lower node is v if v is a saddle vertex. From the event description in Section 3, we know that as we raise v the next event happens as $h(v)$ becomes equal to $h(u)$ for some u in X . To detect the next event, we maintain a priority queue of vertices in X with their height as priority, and simply retrieve the minimum priority event. If v and u are saddle vertices then an interchange event occurs otherwise a local event occurs. As described in Section 3.1, we distinguish between shift, birth and death events by looking at how u and v change from regular to critical vertex or vice versa during the event. Both before and after an event, we can determine whether u and v are critical or regular in $O(1)$ time using their link pointers. As also described in Section 3.1, an auxiliary event can be detected by simply examining whether (v, u) is in either the ascent tree pointed to by v or the descent tree pointed to by u .

If an interchange event occurs the endpoints of the edges containing v changes which requires the priority queue to be updated accordingly. Similarly, if a birth or death event occurs the edges of $\mathbb{T}$ change locally around v and u , and the priority queue needs to be updated accordingly.

5 Extensions and Applications

In this section we describe how our data structure can be extended to support a range of other triangulation update operations besides $\text{CHANGEHEIGHT}(v, r)$. We also describe how the data structure can be extended to maintain $\mathbb{T}$ as the entire mesh varies over time. Finally, we show how the data structure can be used to maintain persistence pairs of h as it varies over time.

5.1 High-Level Operations

We describe high-level operations to update the triangulation $\mathbb{M}$. In particular we show how to insert and delete vertices and how to perform edge flips. These operations are sufficient for supporting a wide number of important algorithms including e.g. algorithms for maintaining constrained Delaunay triangulations.

Insert vertex. The $\text{INSERT}(v, r)$ operation inserts vertex $v \in \mathbb{R}^2 - V$ with height $r \in \mathbb{R}$ into $\mathbb{M}$. If v is not on an edge of $\mathbb{M}$ it is contained in a triangle $t \in F$ with vertices v_1, v_2 and v_3 . We first insert v in $\mathbb{M}$ by connecting it to v_1, v_2 and v_3 , creating three new triangles and removing t . Initially we set the height of v to the elevation of Σ at v (given by linear interpolation on the vertices of t). Note that no point on Σ changes height as a result of this update, and thus $\mathbb{T}$ does not change and neither does any existing link pointers. To update the descent tree forest of Σ , we select a vertex u in $\text{Lk}^-(v)$. Assume that u belongs to $\Pi^\downarrow(x)$. We then

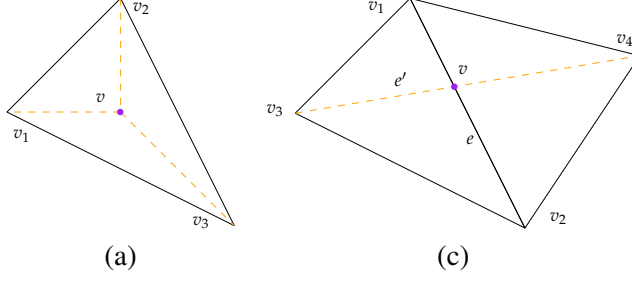


Figure 12: Updating $\mathbb{M}$. (a) Inserting/deleting vertex v , (b) inserting v on an edge e and flipping edge $e = v_1v_2$.

create a descent tree vertex representing v and make it the child of u in $\Pi^\downarrow(x)$. Updating the ascent tree forest is similar. Link pointers from v are created by looking at vertices in $\text{Lk}(v)$ consisting of the three vertices of t . Finally we invoke $\text{CHANGEHEIGHT}(v, r)$ to set the elevation of v correctly. Note that this works on the unbounded face as well, by fixing the elevation of v_∞ appropriately. A similar procedure to the above is used when v lies in the interior of an edge $e = v_1v_2$ of $\mathbb{M}$. Let v_3 and v_4 be the vertices opposite e in $\mathbb{M}$, refer to Figure 12(b). In this case we need to add edges vv_3 and vv_4 to $\mathbb{M}$ and update the data structure in a way that is similar to what is described above.

Delete vertex. The $\text{DELETE}(v)$ operation deletes vertex $v \in V$ from $\mathbb{M}$ where $v \neq v_\infty$. We assume that $|\text{Lk}(v)| = 3$. Let $\text{Lk}(v) = \{v_1, v_2, v_3\}$ and set r to the height of the triangle $t = v_1v_2v_3$ at v , found by linear interpolation. We first invoke $\text{CHANGEHEIGHT}(v, r)$ to ensure that v lies in the plane of t . This implies that v is not a critical vertex of Σ and that we can remove v without affecting the height of any point on Σ , and therefore also without affecting $\mathbb{T}$. Then we simply remove v from $\mathbb{M}$ along with edges vv_1 , vv_2 and vv_3 and their associated faces. Assume v belongs to $\Pi^\downarrow(x)$, the neighbors of v in $\Pi^\downarrow(x)$ either belong to $\text{Lk}^-(v)$ or $\text{Lk}^+(v)$. We simply update $\Pi^\downarrow(x)$ by removing v and connecting neighbors in $\text{Lk}^+(v)$ to a neighbor in $\text{Lk}^-(v)$. Since v is not a minima $\text{Lk}^-(v)$ is always nonempty. The ascent tree containing v is updated in a similar way. If either one of v_1 , v_2 or v_3 has a lower link pointer to v , we simply replace this pointer with the lower link pointer of v . Upper link pointers are updated in a similar way. Similarly to the INSERT operation, $\text{DELETE}(v)$ works if v is on the boundary of $\mathbb{M}$, i.e. when v is adjacent to v_∞ .

Edge Flip. The $\text{EDGEFLIP}(e)$ operation flips an edge $e = u_1u_2 \in E$ of $\mathbb{M}$, where $u_1, u_2 \neq v_\infty$. Let v_3 and v_4 be the vertices opposite e in $\mathbb{M}$, refer to Figure 12(b). If the quadrilateral $v_1v_2v_3v_4$ is not convex, the operation is undefined. The edge flip is accomplished by first invoking $\text{INSERT}(v, r)$ where v is the intersection of e and the line segment v_3v_4 and r is found by linear interpolation at v across v_3v_4 . We can then delete vertex v using a slightly modified version of the $\text{DELETE}(v)$ operation: instead of deleting edge v_3v and vv_4 we merge them to create one big edge $e' = v_3v_4$. Due to the selection of r , this does not affect the height of any point on Σ . Similarly to the above two operations, the edge flip can be made to work if v_3 or v_4 is v_∞ .

5.2 Deforming the entire mesh

Our data structure easily extends to maintaining $\mathbb{T}$ as the entire mesh varies over time since the topology changing events and the way these are handled will be the same. Instead of maintaining certificates involving only a single vertex v of Σ , we maintain a certificate for every edge (v, u) of Σ that fail as $h(v) = h(u)$, and a certificate for every edge (α, β) that fail as $h(\alpha) = h(\beta)$.

5.3 Topological persistence

Topological persistence was introduced by Edelsbrunner et al. [7] and can roughly be defined as follows. Suppose we sweep a horizontal plane in the direction of increasing values of h and keep track of connected components in $\mathbb{M}_{<\ell}$ while increasing ℓ . A component of $\mathbb{M}_{<\ell}$ is started at a minimum vertex and ends at a negative saddle vertex when it joins with an older component. Similarly, a hole of $\mathbb{M}_{<\ell}$ is started at a positive saddle and ends at a maximum vertex. Based on this it is possible to define minimum-saddle and maximum-saddle *persistence pairs* between the critical vertex that starts a component or hole and the one that ends it. The *persistence value* of a persistence pair is simply the height difference between the vertices i.e. it is the difference between the height at which the corresponding component was started and the height it was ended. In the following sections, we will first describe the notion of join and split trees and how these can be maintained during a $\text{CHANGEHEIGHT}(v, r)$ operation, and then we will show how persistence pairs can be maintained using join and split trees.

5.3.1 Maintaining join and split tree

As described the contour tree of Σ encodes the topological changes in Σ_ℓ as we increase ℓ from $-\infty$ to ∞ . The *join tree* encodes a subset of these changes i.e. the topological changes in $\Sigma_{<\ell}$ that occur as components in $\Sigma_{<\ell}$ are created at minimum vertices of Σ and merged at negative saddle vertices of Σ . Similarly, the *split tree* encodes the subset of topological changes in $\Sigma_{>\ell}$. As a result the events that occur on the merge and split tree of Σ from a CHANGEHEIGHT operation are a subset of the events that occur on the contour tree. For example, the events that occur on the join tree are the events that involve the minima and negative saddle vertices of Σ i.e. the negative interchange events, sign change events and a subset of the local events. The algorithm described above can therefore also be used to maintain the merge and split tree of Σ the only difference being the reduced set of events. Note that to actually detect sign change events we need to maintain $\mathbb{T}$ simultaneously with $\mathcal{J}$ or augment the positive saddle vertices of Σ to the edges of $\mathcal{J}$.

5.3.2 Maintain topological persistence pairs

Consider the join tree $\mathcal{J}$ of Σ and let α be a negative saddle in $\mathcal{J}$. Assume that $\mathcal{J}'$ and $\mathcal{J}''$ are subtrees of $\mathcal{J}$ rooted in the children of α such that x' and x'' are the lowest minimum nodes of $\mathcal{J}'$ and $\mathcal{J}''$, respectively. Then the highest of x' and x'' is paired with α . Therefore, by augmenting every negative saddle node α in $\mathcal{J}$ with a pointer to the lowest minimum node in the subtree rooted in α , we implicitly represent the persistence pairs of Σ . The extra information augmented to $\mathcal{J}$ is straightforward to maintain during the merge tree events described above. However, maintaining the extra information in $\mathcal{J}$ creates the need for a new event that occurs as the height of two minimum vertices becomes equal.

Let x and y be minimum vertices in Σ such that $h_{t_0}(x) = h_{t_0}(y)$. Assume that $h_{t_0^-}(x) < h_{t_0^-}(y)$, then nothing happens unless the least common ancestor $\text{LCA}(x, y)$ of x and y in $\mathcal{J}$ stores a pointer to y . If this is the case we must update $\text{LCA}(x, y)$ and any direct ancestor that also points to x . If the merge tree is represented as a dynamic tree, then this is straightforward to do in $O(\log(n))$ time.

References

- [1] P. K. Agarwal, L. Arge, and K. Yi. I/O-efficient batched union-find and its applications to terrain analysis. In *SCG '06: Proceedings of the twenty-second annual symposium on Computational geometry*, pages 167–176, New York, NY, USA, 2006. ACM.
- [2] L. Arge, M. Revsbæk, and N. Zeh. I/o-efficient computation of water flow across a terrain. In *Symposium on Computational Geometry*, pages 403–412, 2010.

- [3] H. Carr, J. Snoeyink, and U. Axen. Computing contour trees in all dimensions. *Computational Geometry: Theory and Applications*, 24(2):75–94, 2003.
- [4] H. Carr, J. Snoeyink, and M. van de Panne. Flexible isosurfaces: Simplifying and displaying scalar topology using the contour tree. *Comput. Geom.*, 43(1):42–58, 2010.
- [5] A. Danner, T. Mølhave, K. Yi, P. K. Agarwal, L. Arge, and H. Mitasova. Terrastream: From elevation data to watershed hierarchies. In *Proc. ACM Symposium on Advances in Geographic Information Systems*, page (to appear in November), 2007.
- [6] H. Edelsbrunner, J. Harer, A. Mascarenhas, V. Pascucci, and J. Snoeyink. Time-varying reeb graphs for continuous space-time data. *Comput. Geom.*, 41(3):149–166, 2008.
- [7] H. Edelsbrunner, D. Letscher, and A. Zomorodian. Topological Persistence and Simplification. In *Proceedings of the 41st Annual Symposium on Foundations of Computer Science*, pages 454–463, 2000.
- [8] L. Guibas. Modeling motion. In J. Goodman and J. O’Rourke, editors, *Handbook of Discrete and Computational Geometry*, pages 1117–1134. Chapman and Hall/CRC, 2nd edition, 2004.
- [9] I. Safa and Y. Wang. Maintaining persistence and contour trees for time varying functions on 2 or 3-manifolds. Technical report, The Ohio State University, 2014.
- [10] D. D. Sleator and R. E. Tarjan. A Data Structure for Dynamic Trees. *Journal of Computer and System Sciences*, 26(3):362–391, 1983.
- [11] S. P. Tarasov and M. N. Vyalyi. Construction of contour trees in 3D in $O(n \log n)$ steps. In *Proc. 14th Sympos. Comput. Geom.*, pages 68–75, 1998.
- [12] M. van Kreveld, R. van Oostrum, C. Bajaj, V. Pascucci, and D. Schikore. Contour trees and small seed sets for isosurface traversal. pages 212–220, 1997.